
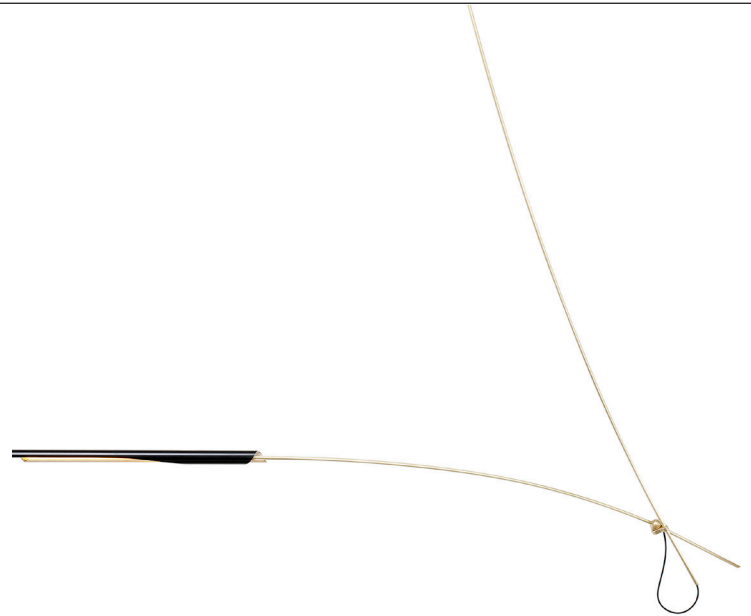


No. 443

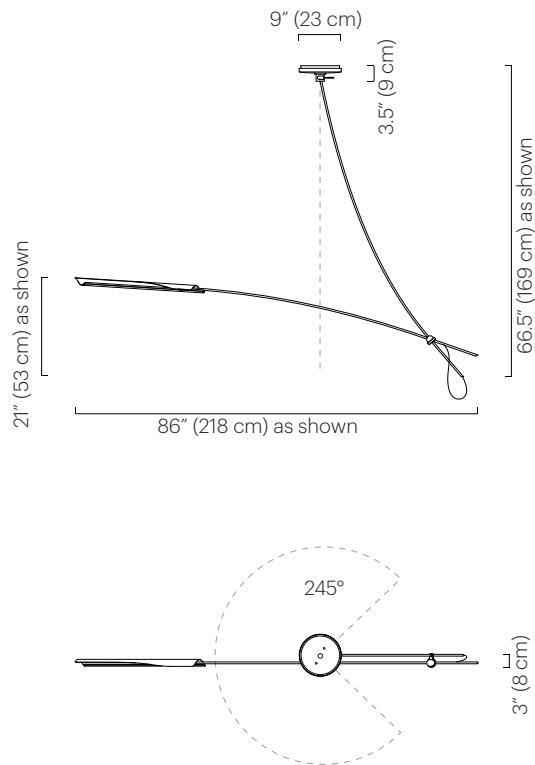

Description

The OTTO One Arm features a single cantilevered arm extending from a drop. The naturally occurring arcs of the fixture will vary depending on the length of the drop. The OTTO shade contains a dimmable LED source and rotates 300° to cast light directionally. The fixture can rotate 245° from the canopy.

Materials

Shade: Powder coated aluminum
Ceiling mount: Powder coated and plated aluminum
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 840 (equivalent to one 60W incandescent bulb)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

For 120V areas: 20W 24V phase dimmable class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage

24V / 11 watts

Weight

5 lbs (2.3 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Arm length is fixed.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.

Remarks continued

Hardware finish consistent with frame finish.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

3" D x 86" W x 21" H
(8 D x 218 W x 53 cm H)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Shade: 1.5" Ø x 28" L
(4 Ø x 71 cm L)
Min overall height: 27.5" (70 cm)
Max overall height: 135.5" (344 cm)



**David
Weeks
Studio**

STOREFRONT
38 Walker Street
New York, NY 10013
212 966 3433