

BUSTER + PUNCH

BUSTER BULB / TEARDROP

TECH SPEC




BUSTER BULB

The World's first designer LED bulb. This bulb consumes just 1/20th of the energy of traditional bulbs with a life span of 30,000 hours. Available in CRYSTAL, GOLD or SMOKED finish. The resin light pipe at the centre of the bulb is where all the magic happens, allowing the bulb to create a subtle ambient light whilst at the same time throw focused spot light onto tables & surfaces below. The bulb fits in any E27 screw light fitting, but looks especially great when teamed up with our HEAVY METAL or HOOKED lighting ranges.



BUSTER BULB / TEARDROP / DIMMABLE
TECH SPEC

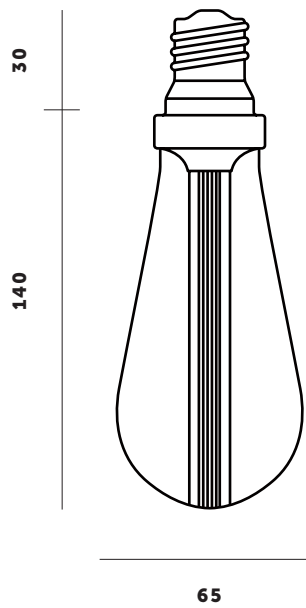

FINISH	SKU	FINISH	SKU
Crystal / Dimmable / Polycarbonate	BB-TD-E27-D-CR-B	Crystal / Dimmable / Glass	CBB-121026
Gold / Dimmable / Polycarbonate	BB-TD-E27-D-GO-B	Gold / Dimmable / Glass	CBB-131028
Smoked / Dimmable / Polycarbonate	BB-TD-E27-D-SM-B	Smoked / Dimmable / Glass	CBB-091027

SPECIFICATIONS

Power: 5W
Type: Dimmable LED
Screw fitting: E27
Supply: 240 VAC
Expected Life: 30 000 hrs
Lumen: Crystal max 250, Gold max 200, Smoked max 130.
Light appearance: Crystal 2700k, Gold 2500k, Smoked 2600k.
CRI: 80

Power factor: 0.88
Recommended dimmer module: Buster + Punch LED module.
 (Sold with our dimmer switches)
Please note: Not suitable for DALI dimming systems.
CE certified.*
For indoor use only.

CARE INSTRUCTIONS

Wipe with damp cloth with no loose hairs, avoid using any chemicals. Please note all finishes are prone to aging.

* Official data doc can be supplied upon request.


PLEASE NOTE

The dimmable LED BUSTER BULB requires a LED-compatible dimmer switch, like the Buster + Punch Premium dimmer switch. They can also be used with on/off switches.


If you are looking to use this product in conjunction with a smart or home automation system, please refer to the system manufactures guidance to check compatibility. Our bulbs are mains dimmable via phase cut/trailing edge dimming. To avoid disappointment, please ensure a compatible smart module is fitted before purchase.

SPECTRAL IRRADIANCE AT 3M

5W DIMMABLE

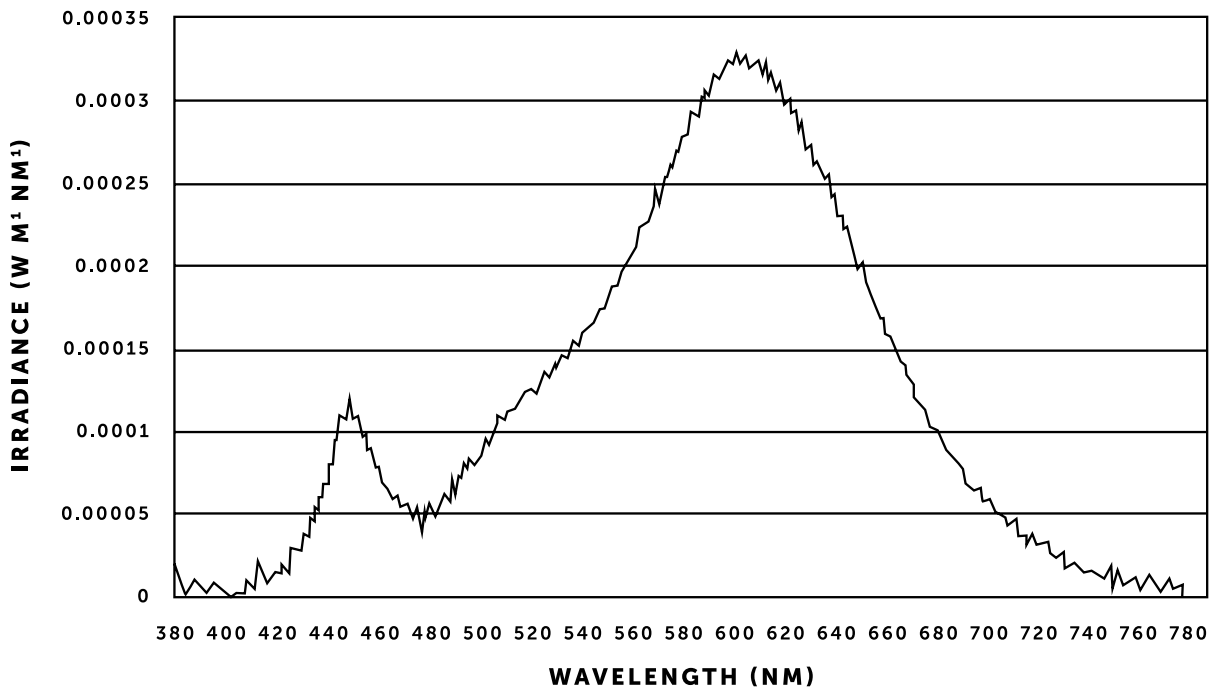

POLAR CANDELA DISTRIBUTION

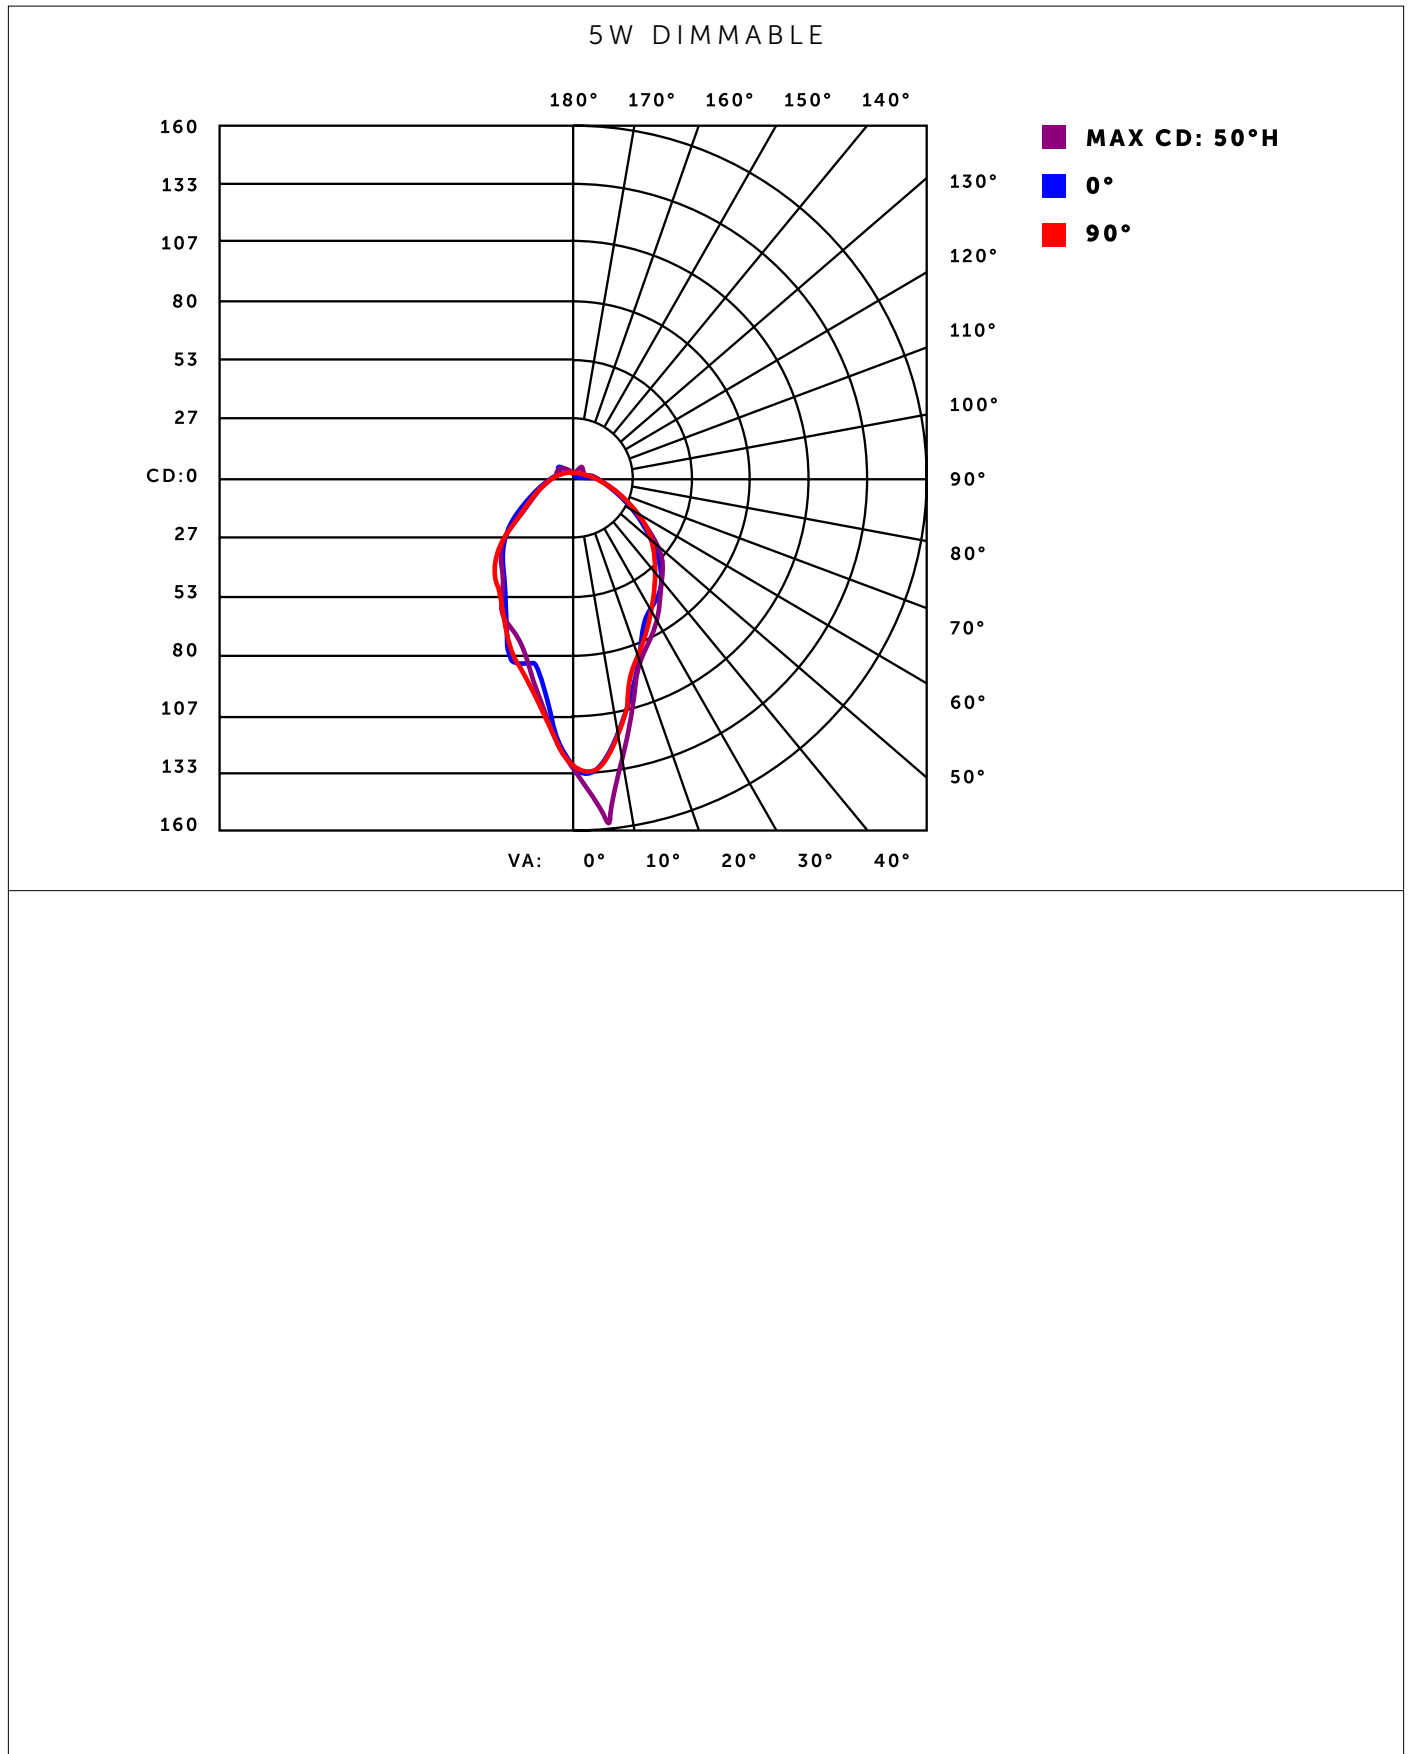

CRI 1931

5 W DIMMABLE

CIE 1931 Chromaticity Cx: 0.4629
CIE 1931 Chromaticity Cy: 0.4145

