

DIRO OVERVIEW

Diro can be very discreet, hiding in the ceiling - like Mini Diro - or it can be very present, giving that extra touch to a room - like Diro ST - with a golden finish. But one thing all members of the Diro family have in common is that the light source is deeply recessed into the luminaire, resulting in a high level of visual comfort.

This range has LED or halogen solutions, with or without trim, in single or double versions, with different colour finishes.

Moreover, the IP44 rating on some Diro luminaires means that they can be used even in bathrooms or other damp indoor locations.

MINI DIRO

Mini Diro Trimless embodies our ongoing quest towards miniaturisation of luminaires. This unobtrusive and extremely petite downlighter strikes a perfect balance between size and luminous flux, resulting in clean sightlines and minimal appearance. The Mini Diro is the ideal solution for projects where the luminaire design is not supposed to dominate the interior design.

DIRO

The bigger Diro is a more extensive range, offering multiple finishing colours, adjustable luminaires, Soft Dim and also IP44 solutions for use in bathrooms. The trimless finishing is in line with Mini Diro Trimless: focus on the light rather than the luminaire.

DIRO SBL

Diro SBL is something more than your regular downlighter. It is a range of recessed and surface mounted luminaires, finished with an eye for visual comfort, as it has a multi-layered optic finished with a prismatic plexi at the front. It has a driver included and its reduced height allows you to install it anywhere, either built in or built on.




INTERIOR
CEILING RECESSED

			MINI DIRO	DIRO		DIRO GT	DIRO SBL
			LED 425 - 558 lm	LED 774 - 1075 lm	HALOGEN	LED 774 - 1075 lm	LED 882 - 2635 lm
	TRIMLESS	FIX					
		ADJUSTABLE					
	TRIM	FIX					
		ADJUSTABLE					
	TRIM	FIX					✓

MINI DIRO




DIRO TRIMLESS



DIRO TRIMLESS LED +
MOUNTING KIT R82 TRIMLESS OFA IN CONCRETE

MINI DIRO TRIMLESS



67 x 70 / max.25


REQUIREMENTS

LED POWER SUPPLY 350-500mA-DC / DIM

3000K / CRI>80	2700K / CRI>80
LED [C] 4,1W / 420lm / 350mA LED [C] 6W / 558lm / 500mA	LED [C] 4,1W / 420lm / 350mA LED [C] 6W / 558lm / 500mA
20°	
415 332 832	415 332 822

0,2 IP20

DIRO TRIMLESS LED



ØKIT x 95

REQUIREMENTS

MOUNTING KIT R82 TRIMLESS O.F.A. ► 15212 2000

LED POWER SUPPLY 350-500mA-DC / DIM


LED POWER SUPPLY 650mA-DC / SOFT DIM

3000K / CRI>90	2700K / CRI>90	2700-1800K / CRI>90
LED [H] 7,1W / 805lm / 350mA LED [H] 10,4W / 1118lm / 500mA	LED [H] 7,1W / 773lm / 350mA LED [H] 10,4W / 1073lm / 500mA	LED [S] 9,5W / 760lm / 650mA
33°	33°	40°
202 144 811 932 ◇	202 144 811 922 ◇	202 144 1902 ◇

◇ B / MMAT / W

0,3 IP20
IP23

DIRO TRIMLESS LED IP



ØKIT x 95

REQUIREMENTS

MOUNTING KIT R82 TRIMLESS O.F.A. ► 15212 2000


LED POWER SUPPLY 350-500mA-DC / DIM

3000K / CRI>90	2700K / CRI>90
LED [H] 7,1W / 805lm / 350mA LED [H] 10,4W / 1118lm / 500mA	LED [H] 7,1W / 773lm / 350mA LED [H] 10,4W / 1073lm / 500mA
33°	
202 146 811 932 ◇	202 146 811 922 ◇

◇ B / W

0,3 IP44

DIRO TRIMLESS OK LED



ØKIT x 105

REQUIREMENTS

MOUNTING KIT R82 TRIMLESS O.F.A. ► 15212 2000


LED POWER SUPPLY 350-500mA-DC / DIM

3000K / CRI>90	2700K / CRI>90
LED [H] 7,1W / 805lm / 350mA LED [H] 10,4W / 1118lm / 500mA	LED [H] 7,1W / 773lm / 350mA LED [H] 10,4W / 1073lm / 500mA
33°	
202 145 811 932 ◇	202 145 811 922 ◇

◇ B / MMAT / W

0,3 IP20

DIRO TRIMLESS OK



ØKIT x 135

REQUIREMENTS

MOUNTING KIT R82 TRIMLESS ► 202 11 82

OPTIONS

TRANSFO 50W ► 200 46 06

TRANSFO 100W ► 200 46 10

LED SOLUTION PAG TEC 8

ACCESSORIES


ANTI GLARE TUBE

1 x QR-C51 max.50W
202 14 90 ◇
◇ B / W
GX5.3 / 12V
0,2 IP20 0,5

DIRO



DIRO ST OK LED




76 x 115 / min.5

REQUIREMENTS

LED POWER SUPPLY 350-500mA-DC / DIM

3000K / CRI>90	2700K / CRI>90
LED [H] 7,1W / 805lm / 350mA LED [H] 10,4W / 1118lm / 500mA	LED [H] 7,1W / 773lm / 350mA LED [H] 10,4W / 1073lm / 500mA
33°	
202 292 811 932 ◇	202 292 811 922 ◇
◇ B / MMAT / W	
◇ 0,4 IP20 IP23	

DIRO DUO ST OK LED



153 x 75 x 110 / max.22

REQUIREMENTS


LED POWER SUPPLY 350-500mA-DC / DIM

OPTIONS

PLASTERKIT 104 ► 202 14 29

3000K / CRI>90	2700K / CRI>90
2 x LED [H] 7,1W / 805lm / 350mA 2 x LED [H] 10,4W / 1118lm / 500mA	2 x LED [H] 7,1W / 773lm / 350mA 2 x LED [H] 10,4W / 1073lm / 500mA
33°	
202 292 812 932 ◇	202 292 812 922 ◇
◇ W	
◇ 0,8 IP20 IP23	

DIRO ST OK



76 x 100 / max.22

OPTIONS

PLASTERKIT 101 ► 202 11 19

TRANSFO 50W ► 200 46 06

TRANSFO 100W ► 200 46 10


LED SOLUTION PAG TEC 8

ACCESSORIES

ANTI GLARE TUBE

1 x QR-C51 max.50W
202 14 61 ◇
◇ B / MMAT / W
GX5.3 / 12V
◇ 0,1 IP20 0,5

DIRO OK



76 x 100 / max.22

OPTIONS

PLASTERKIT 101 ► 202 11 19

TRANSFO 50W ► 200 46 06

TRANSFO 100W ► 200 46 10


LED SOLUTION PAG TEC 8

ACCESSORIES

ANTI GLARE TUBE

1 x QR-C51 max.50W
202 14 11 ◇
◇ W-W
GX5.3 / 12V
◇ 0,1 IP20 0,5

DIRO OK HI



76 x 100

OPTIONS

LED SOLUTION PAG TEC 8

1 x QPAR51 max.35W
202 14 1210 ◇
◇ W-W
GU10 / 100-240V / 50-60Hz
◇ 0,1 IP20 0,5


**DIRO
GT**



**DIRO
SBL**



DIRO GT LED



76 x 90 / min.5

REQUIREMENTS

LED POWER SUPPLY 350-500mA-DC / DIM
LED POWER SUPPLY 650mA-DC / SOFT DIM


3000K / CRI>90	2700K / CRI>90	2700-1800K / CRI>90
LED [H] 7,1W / 805lm / 350mA LED [H] 10,4W / 1118lm / 500mA	LED [H] 7,1W / 773lm / 350mA LED [H] 10,4W / 1073lm / 500mA	LED [S] 9,5W / 760lm / 650mA
33°	33°	40°
202 342 811 932 ◇	202 342 811 922 ◇	202 342 1902 ◇

◇ W



DIRO SBL S


NEW



121 x 65 / max.25


3000K / CRI>80	2700K / CRI>80
LED CLUSTER 5,9W / 882lm / 350mA	
202 295 83 ◇	202 295 82 ◇
◇ B / W	◇ W

100-240V / 50-60Hz



DIRO SBL M


NEW



156 x 70 / max.25


3000K / CRI>80	2700K / CRI>80
LED CLUSTER 9,8W / 1500lm / 350mA	
202 296 83 ◇	202 296 82 ◇
◇ B / W	◇ W

100-240V / 50-60Hz



DIRO SBL L


NEW




208 x 70 / max.25

3000K / CRI>80	2700K / CRI>80
LED CLUSTER 17,5W / 2635lm / 1050mA	
202 297 83 ◇	202 297 82 ◇
◇ B / W	◇ W

100-240V / 50-60Hz



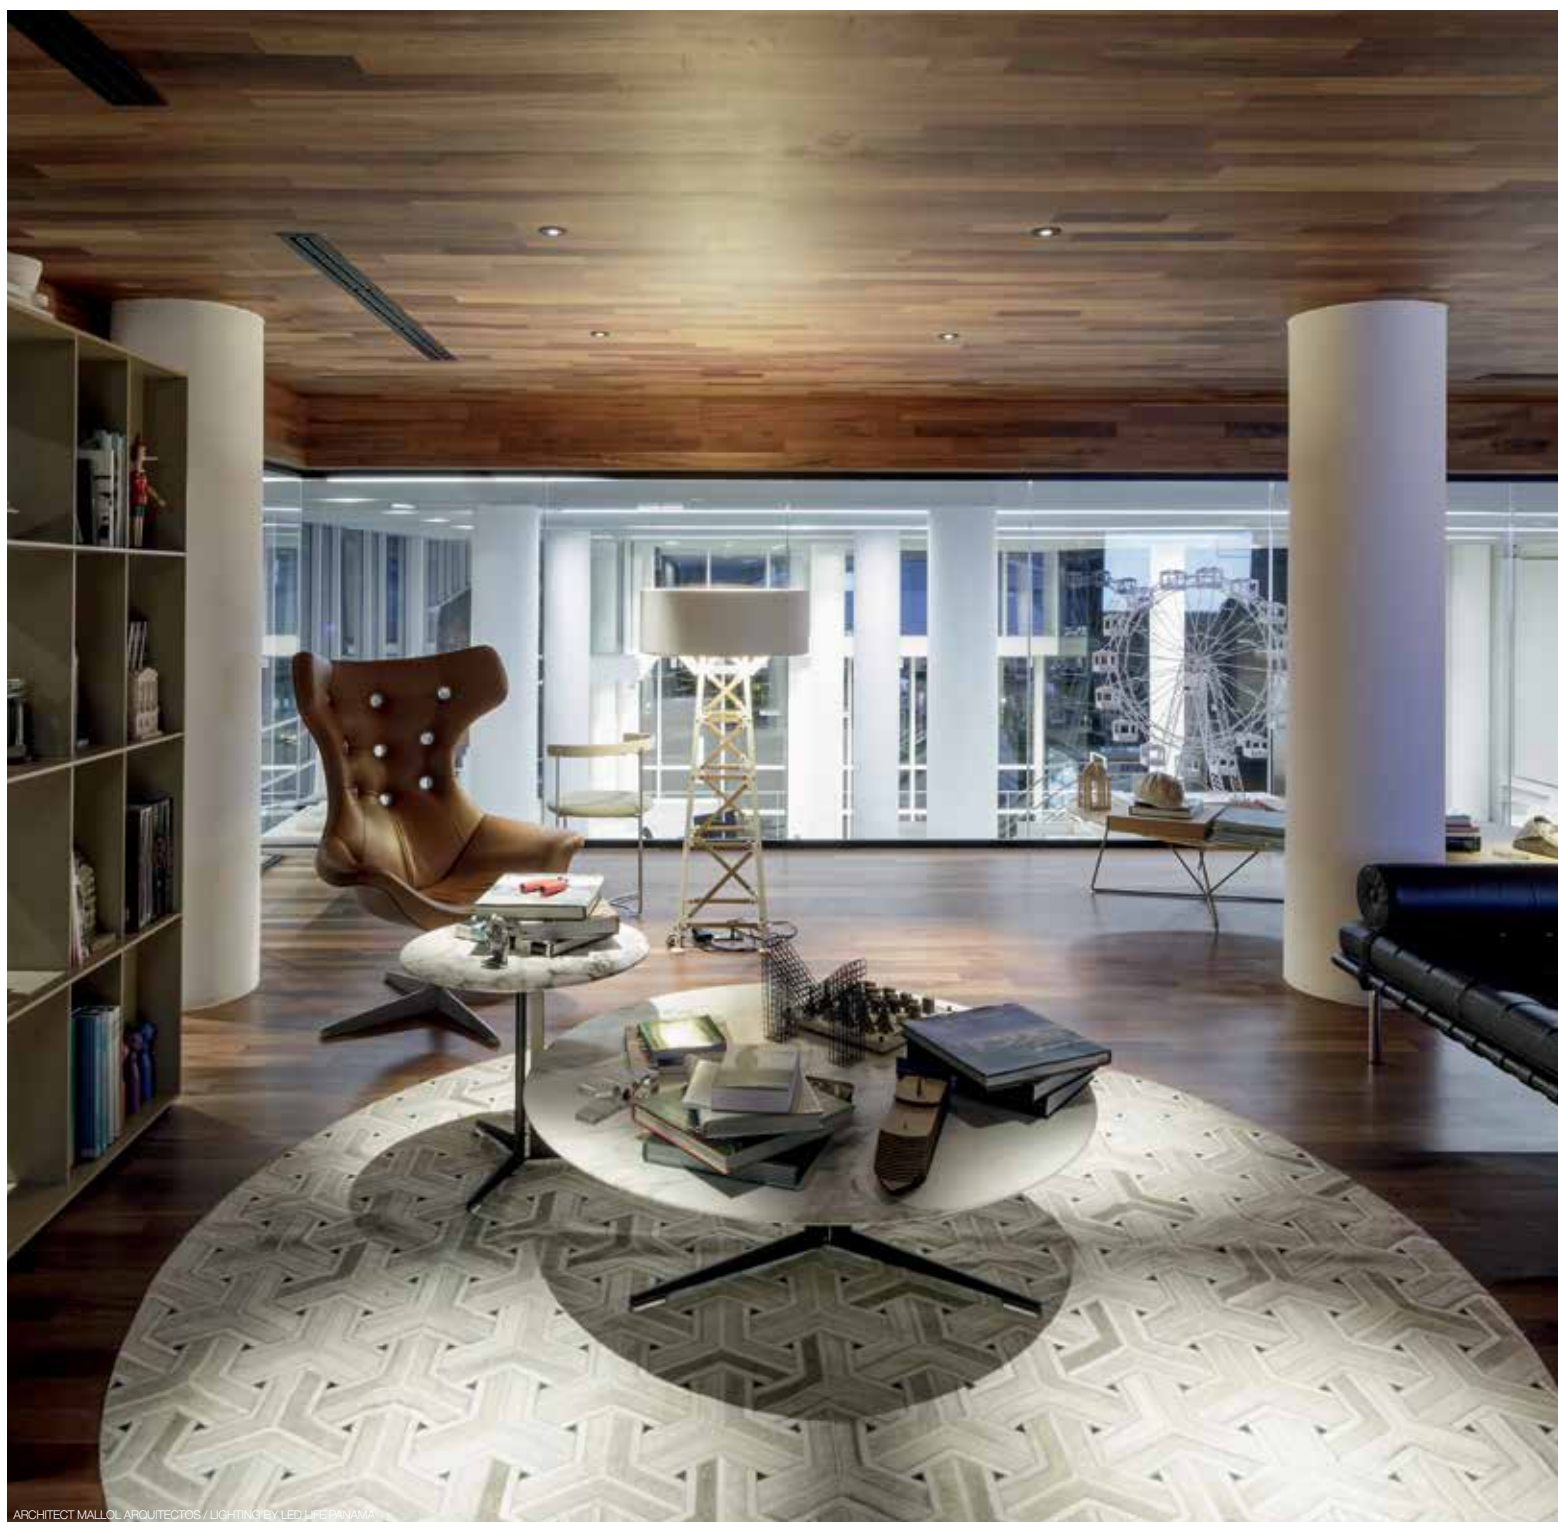


ARCHITECT MALLOL ARQUITECTOS / LIGHTING BY LED LIFE PANAMA

INTERIOR
CEILING RECESSED



ARCHITECT: ARIASRECALDE ARCHITECTURAL WORKSHOP
LIGHTING DESIGN: BIG ARCHITECTURAL LIGHTING

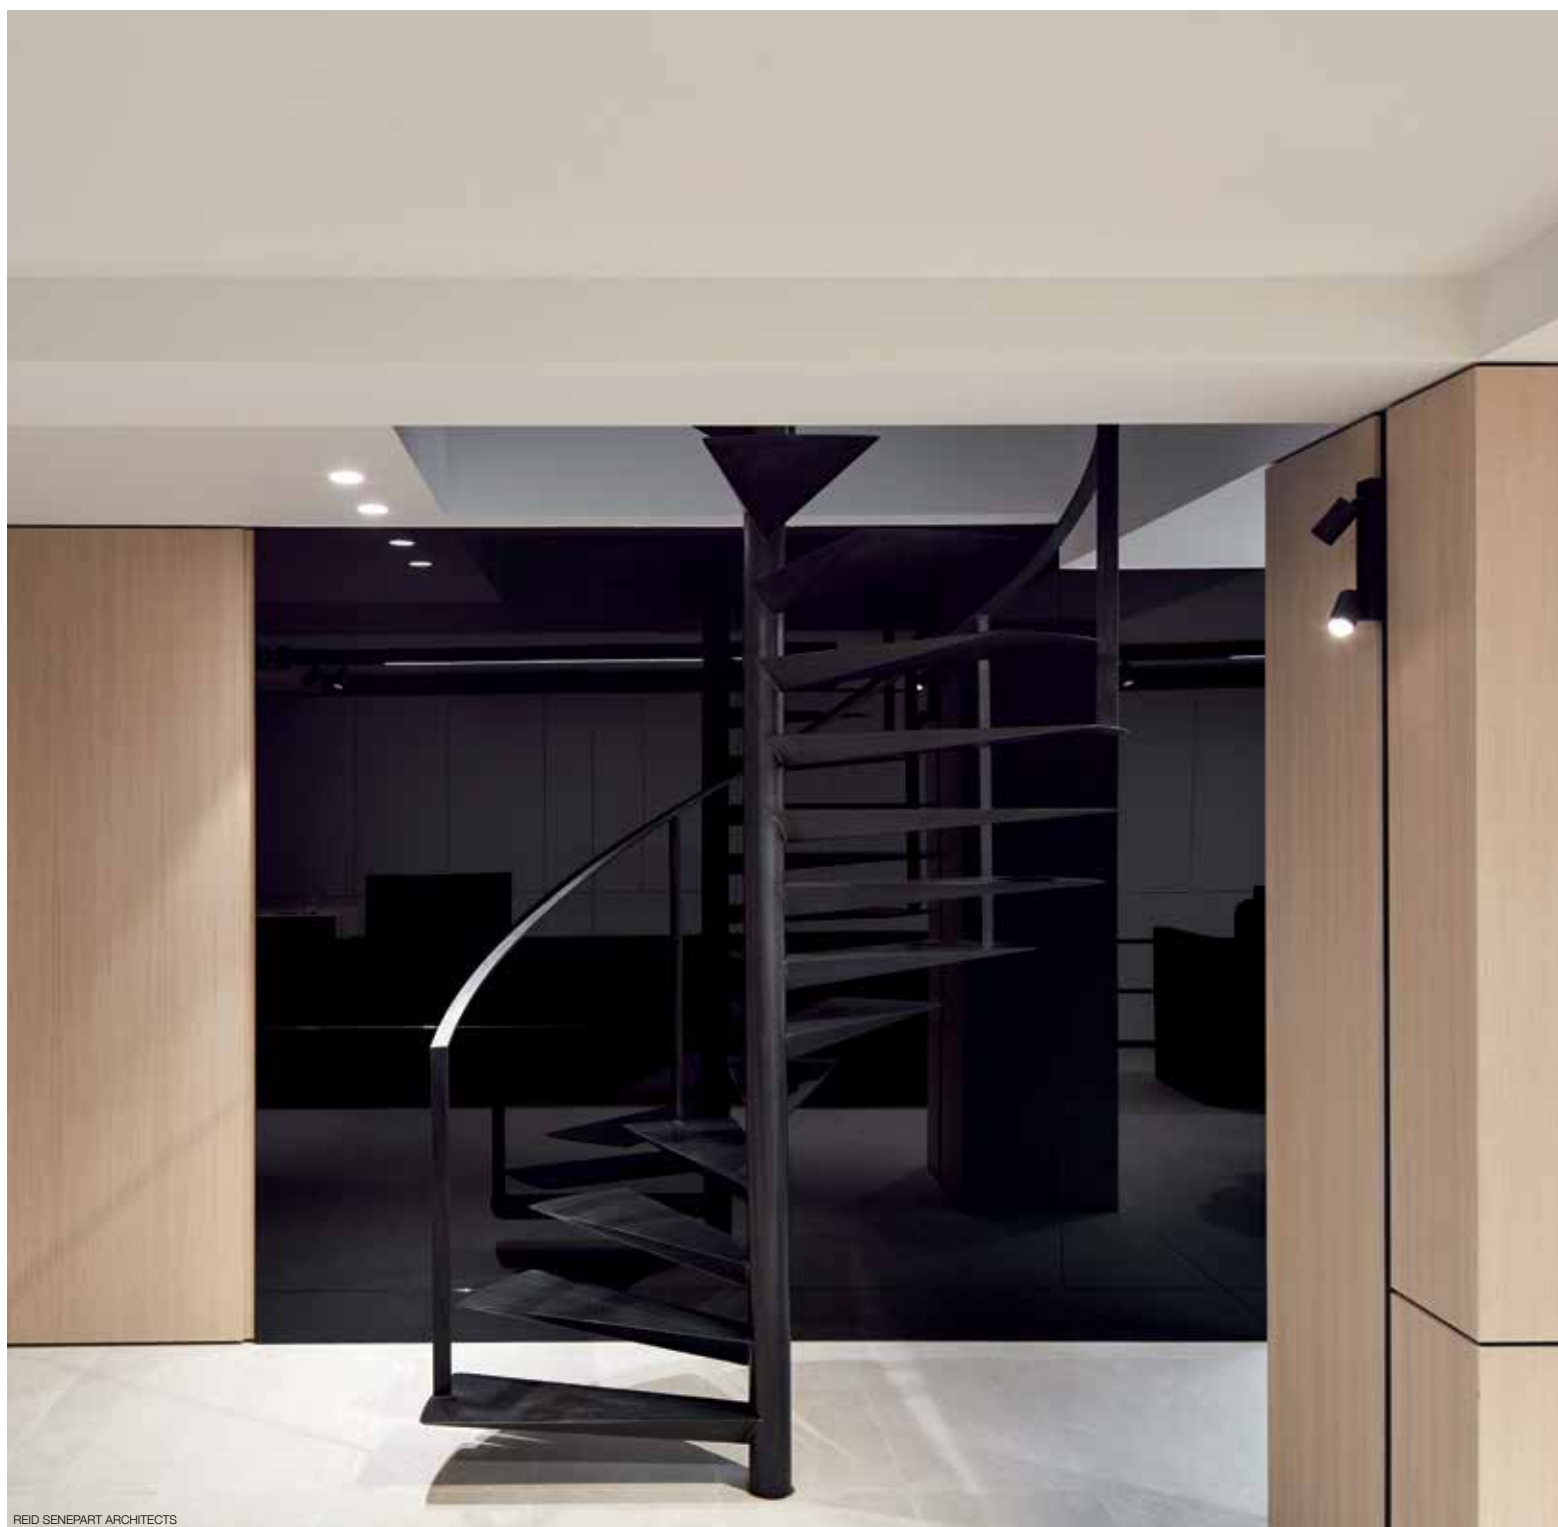

REID SENEPART ARCHITECTS

INTERIOR
CEILING RECESSED









ARCHITECT: ARIASRECALDE ARCHITECTURAL WORKSHOP // LIGHTING DESIGN: BIG ARCHITECTURAL LIGHTING

INTERIOR
CEILING RECESSED



WEWANTMORE & PHOTOGRAPHY FREDERIK VERCRUYSSSE