

DOT.COM OVERVIEW

First introduced in 2004 as a single LED luminaire, upscaled in 2008 as a multiple LED luminaire with 4 or 6 LED dots, implemented in the profile section in 2010 as a module with 4 or 6 LEDs, the history of Dot.Com within the Delta Light® range goes way back.

With LEDs being utterly functional and performant nowadays, Dot.Com is up to its second revival, coming as a complete family of luminaires with multiple LED dots to create the most discreet, yet highly functional light settings.

DOT.COM S

The Small version only needs 25mm of width, a nearly invisible appearance yet with visible impact.

DOT.COM M

The Medium range includes an adjustable version with trim and a trimless solution. The adjustable Dot.Com M - with tilting possibility up to 30° - is ideal for instance to emphasize an artwork on the wall.

The specific design of the trimless luminaire grants the opportunity to install it either completely into the ceiling or semi-recessed, to evoke more expression into the room.

DOT.COM L

With an output up to 12W per luminaire, the Large range is the most powerful within the Dot.Com series. It comes in both recessed and surface mounted versions.

Furthermore, Dot.Com is not only limited to spotlight beam angles, it also has linear wallwashers in its range for a soft, even light effect on vertical surfaces. These come as single luminaires, as modules to fit in the magnetic profiles and as a bespoke trimless profile solution, perfect to adapt the light to your specific desires.

www.deltalight.com/dotcom



INTERIOR
CEILING RECESSED

			S	M	L	WALLWASH
			LED 303 - 606 lm	LED 628 lm	LED 420 - 1092 lm	LED 1000 - 3000 lm
						
	TRIMLESS	FIX				
	TRIM	FIX				
		ADJUSTABLE				
	ON				✓	✓
	MAGNETIC			✓	✓	✓

NEW

DOT.COM S ST




W-B

B-B



DOT.COM S3 ST



58 x 20 x 50 / min.8

REQUIREMENTS

LED POWER SUPPLY 350mA-DC / DIM


3000K / CRI>90		2700K / CRI>90	
LED CLUSTER 3W / 303lm / 350mA		LED CLUSTER 3W / 294lm / 350mA	
34°	59°	34°	59°
424 211 03 932 ◇	424 211 03 933 ◇	424 211 03 922 ◇	424 211 03 923 ◇

◇ B-B / W-B

0,1 IP20

UCR
<16

DOT.COM S6 ST



112 x 20 x 50 / min.8

REQUIREMENTS

LED POWER SUPPLY 350mA-DC / DIM

3000K / CRI>90		2700K / CRI>90	
LED CLUSTER 6W / 606lm / 350mA		LED CLUSTER 6W / 588lm / 350mA	
34°	59°	34°	59°
424 211 06 932 ◇	424 211 06 933 ◇	424 211 06 922 ◇	424 211 06 923 ◇

◇ B-B / W-B


0,2 IP20

UCR
<16

NEW **DOT.COM M**



DOT.COM M4 TRIMLESS



1 KIT x 60

REQUIREMENTS
MOUNTING KIT DOT.COM M4 TRIMLESS ► 424 512 04 00
LED POWER SUPPLY 500mA-DC / DIM


3000K / CRI>90			2700K / CRI>90		
LED CLUSTER 5,6W / 628lm / 500mA			LED CLUSTER 5,6W / 612lm / 500mA		
14°	33°	49°	14°	33°	49°
424 512 04 931 ◊	424 512 04 932 ◊	424 512 04 933 ◊	424 512 04 921 ◊	424 512 04 922 ◊	424 512 04 923 ◊

◊ B / C / MMAT

III 0,2 IP20

UCR
<16

DOT.COM M4 ST OK



1 136 x 40 x 58 / max.25


REQUIREMENTS
LED POWER SUPPLY 500mA-DC / DIM

3000K / CRI>90			2700K / CRI>90		
LED CLUSTER 5,6W / 628lm / 500mA			LED CLUSTER 5,6W / 612lm / 500mA		
14°	33°	49°	14°	33°	49°
424 222 04 931 ◊	424 222 04 932 ◊	424 222 04 933 ◊	424 222 04 921 ◊	424 222 04 922 ◊	424 222 04 923 ◊


◊ B-B / B-C / B-MMAT / W-B / W-C / W-MMAT

III 0,3 IP20


UCR
<16

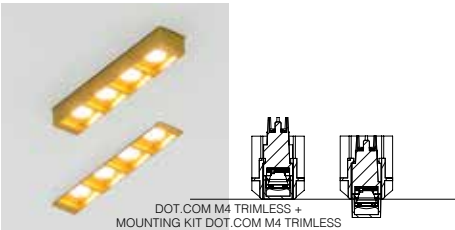

NEW **DOT.COM L**

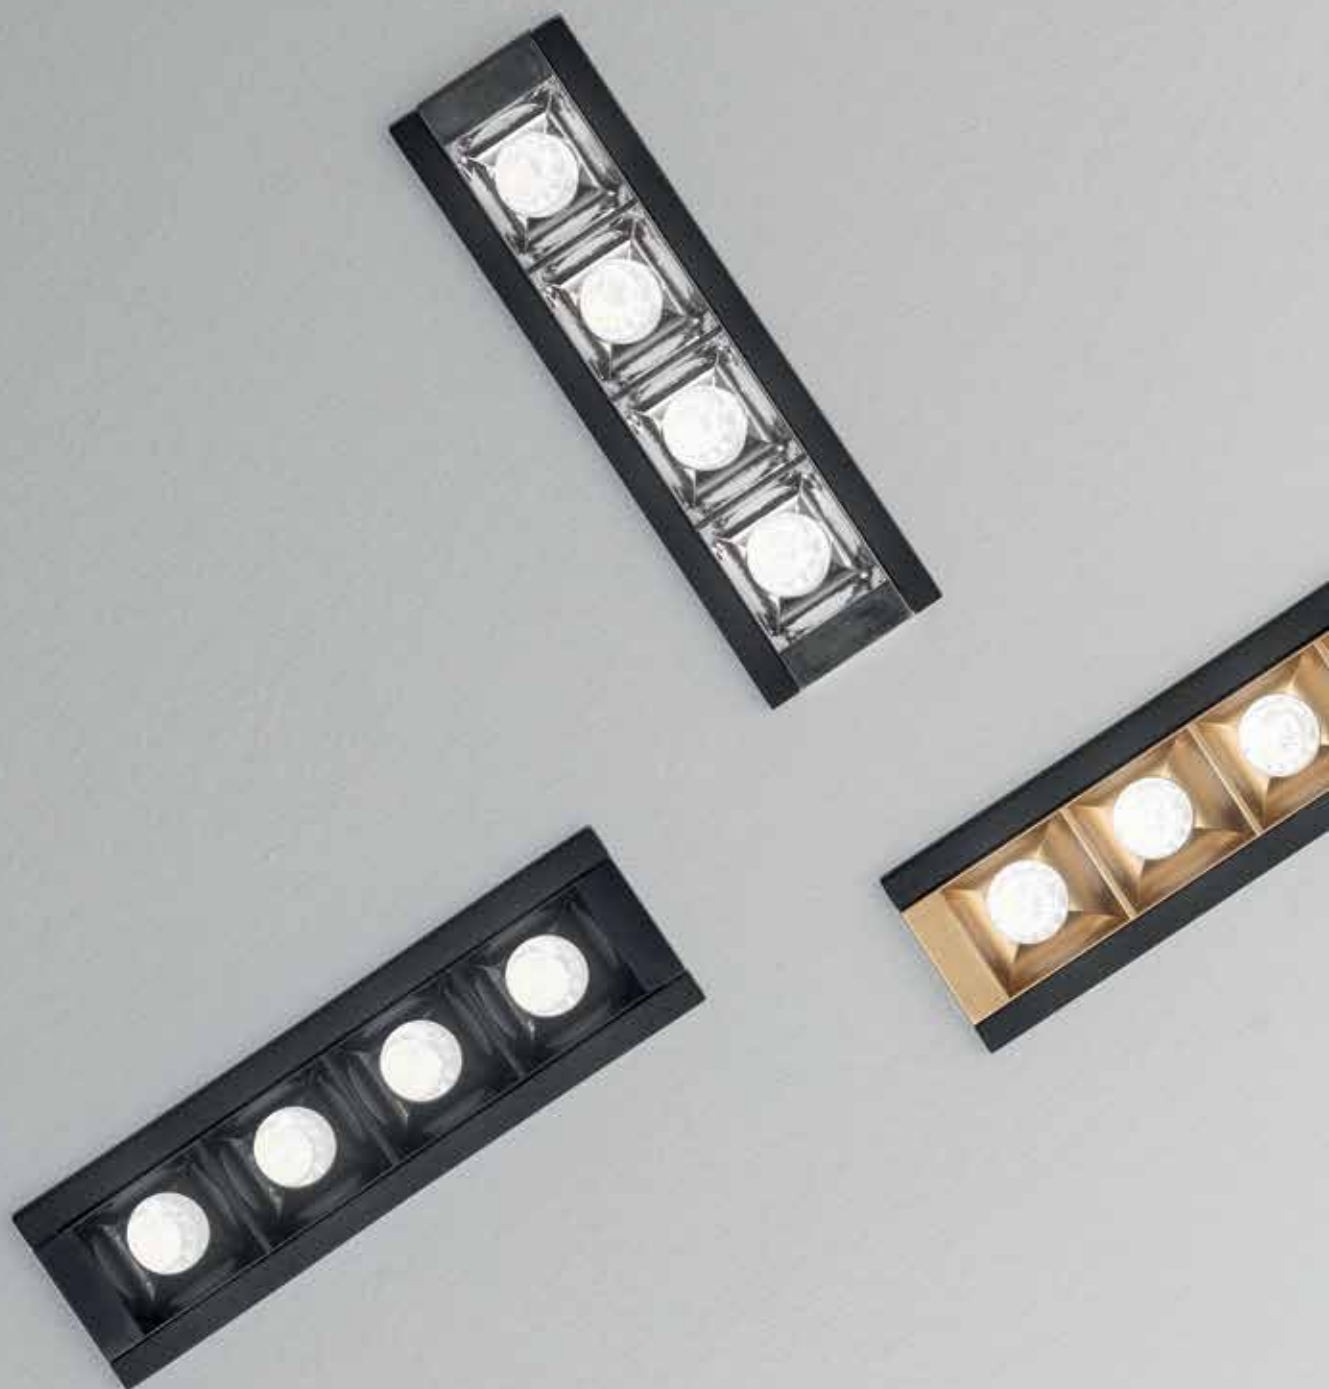

DOT.COM L2 ST



84 x 40 x 62 / max.30

REQUIREMENTS

LED POWER SUPPLY 1050mA-DC / DIM


3000K / CRI>90			2700K / CRI>90		
LED CLUSTER 6,2W / 592lm / 1050mA			LED CLUSTER 6,2W / 576lm / 1050mA		
16°	32°	46°	16°	32°	46°
424 213 02 931 ◇	424 213 02 932 ◇	424 213 02 933 ◇	424 213 02 921 ◇	424 213 02 922 ◇	424 213 02 923 ◇

◇ B-B / B-C / B-MMAT / W-B / W-C / W-MMAT

0,3 IP20

UCR
<16

DOT.COM L4 ST



158 x 40 x 62 / max.30

REQUIREMENTS

LED POWER SUPPLY 1050mA-DC / DIM

3000K / CRI>90			2700K / CRI>90		
LED CLUSTER 12,4W / 1184lm / 1050mA			LED CLUSTER 12,4W / 1152lm / 1050mA		
16°	32°	46°	16°	32°	46°
424 213 04 931 ◇	424 213 04 932 ◇	424 213 04 933 ◇	424 213 04 921 ◇	424 213 04 922 ◇	424 213 04 923 ◇

◇ B-B / B-C / B-MMAT / W-B / W-C / W-MMAT

0,4 IP20


UCR
<16

NEW

DOT.COM WALLWASH



DOT.COM L WALLWASH 02 ST HO




220 x 40 x 50 / min.10

REQUIREMENTS

LED POWER SUPPLY 350mA-DC / DIM

3000K / CRI>90	2700K / CRI>90
LED CLUSTER 10W / 1000lm / 350mA	LED CLUSTER 10W / 1000lm / 350mA
WALLWASH	
424 242 02 93 ◇	424 242 02 92 ◇
◇ W-B	
◇ 0,5 ▼ IP20 ▲ IP43	

DOT.COM L WALLWASH 06 ST HO




624 x 40 x 50 / min.10

REQUIREMENTS

LED POWER SUPPLY 350mA-DC / DIM

3000K / CRI>90	2700K / CRI>90
LED CLUSTER 12,6W / 1500lm / 350mA	LED CLUSTER 12,6W / 1500lm / 350mA
WALLWASH	
11522 9300 ◇	11522 9200 ◇
◇ W-B	
◇ 1,4 ▼ IP20 ▲ IP43	

DOT.COM L WALLWASH 08 ST HO




824 x 40 x 50 / min.10

REQUIREMENTS

LED POWER SUPPLY 500mA-DC / DIM

3000K / CRI>90	2700K / CRI>90
LED CLUSTER 18,4W / 2200lm / 500mA	LED CLUSTER 18,4W / 2200lm / 500mA
WALLWASH	
11523 9300 ◇	11523 9200 ◇
◇ W-B	
◇ 1,8 ▼ IP20 ▲ IP43	

DOT.COM L WALLWASH 12 ST HO



1224 x 40 x 50 / min.10



REQUIREMENTS

LED POWER SUPPLY 700mA-DC / DIM

3000K / CRI>90	2700K / CRI>90
LED CLUSTER 25,2W / 3000lm / 700mA	LED CLUSTER 25,2W / 3000lm / 700mA
WALLWASH	
11524 9300 ◇	11524 9200 ◇
◇ W-B	
◇ 2,5 ▼ IP20 ▲ IP43	



POSITION FOR INSTALLATION

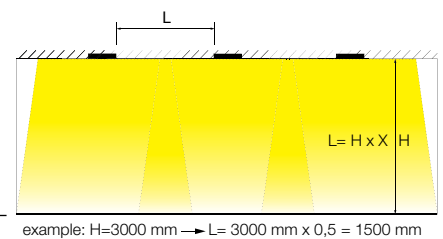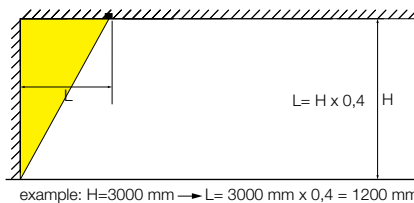

	X
DOT.COM L WALLWASH 02	0,5
DOT.COM L WALLWASH 06	0,25
DOT.COM L WALLWASH 08	0,33
DOT.COM L WALLWASH 12	0,5



INTERIOR
CEILING RECESSED

