




EN-SUITE

En-Suite is straight to the point. Delivering an ambitious 120lm/W with an outer diameter of just 54mm and 50mm height. Minimal recyclable components, efficient use of materials and high performing low glare optics, En-Suite is designed around efficiency in all its aspects and in every detail.

All this makes En-Suite perfectly suitable for energy conscious projects like hospitality and residential: easy to install thanks to its limited height and single circular ceiling cut-out. With options of IP20 and IP44, En-Suite follows through from general areas into damp locations like bathrooms and is highly energy efficient due to the 120 lumens per watt delivered on luminaire level. This high-performer makes it possible to perfectly light up a bathroom of 4m² with only 15W or a hallway of 20m² by consuming only 40W. En-Suite easily lowers the general consumption below 1,50W/m² per 100lux, quite a performance!

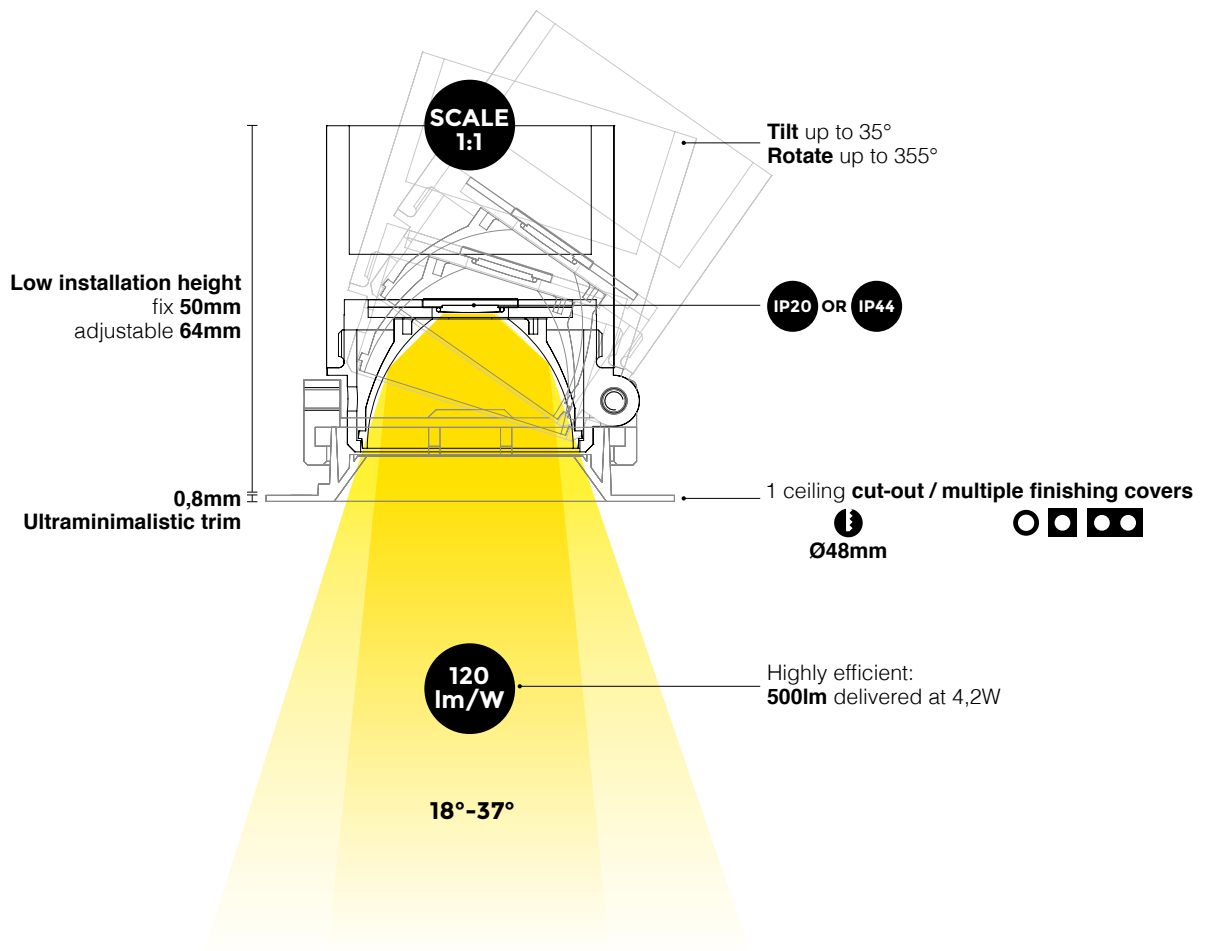

FAMILY OVERVIEW

CHOOSE YOUR COLOUR

○ ●
White or Black


CHOOSE YOUR SHAPE

○ ■ ■ ■
Round / Fix or adjustable
Square / Fix or adjustable
Square Double / Fix
-
IP20 or IP44


LED DATA
4,2W / 605lm

CHOOSE YOUR OPTICS


18° / 37°




REQUIREMENTS
LED POWER SUPPLY 250mA-DC / DIM ► SEE PAGE 74




REQUIREMENTS



REQUIREMENTS



REQUIREMENTS



REQUIREMENTS


3000K / CRI>80		2700K / CRI>80		3000K / CRI>90		2700K / CRI>90	
LED [U] 4,2W / 605lm / 250mA		LED [U] 4,2W / 580lm / 250mA		LED [U] 4,2W / 532lm / 250mA		LED [U] 4,2W / 510lm / 250mA	
18°	37°	18°	37°	18°	37°	18°	37°
26313 8310 ◇	26313 8330 ◇	26313 8210 ◇	26313 8230 ◇	26313 9310 ◇	26313 9330 ◇	26313 9210 ◇	26313 9230 ◇
◇ B / W							
 0.1 IP20							

3000K / CRI>80		2700K / CRI>80		3000K / CRI>90		2700K / CRI>90	
LED [U] 4,2W / 605lm / 250mA		LED [U] 4,2W / 580lm / 250mA		LED [U] 4,2W / 532lm / 250mA		LED [U] 4,2W / 510lm / 250mA	
18°	37°	18°	37°	18°	37°	18°	37°
26314 8310 ◇	26314 8330 ◇	26314 8210 ◇	26314 8230 ◇	26314 9310 ◇	26314 9330 ◇	26314 9210 ◇	26314 9230 ◇
◇ B / W							
    							

3000K / CRI>80		2700K / CRI>80		3000K / CRI>90		2700K / CRI>90	
LED [U] 4,2W / 605lm / 250mA		LED [U] 4,2W / 580lm / 250mA		LED [U] 4,2W / 532lm / 250mA		LED [U] 4,2W / 510lm / 250mA	
18°	37°	18°	37°	18°	37°	18°	37°
26317 8310 ◇	26317 8330 ◇	26317 8210 ◇	26317 8230 ◇	26317 9310 ◇	26317 9330 ◇	26317 9210 ◇	26317 9230 ◇
◇ B / W							
 0.1 IP20							

3000K / CRI>80		2700K / CRI>80		3000K / CRI>90		2700K / CRI>90	
LED [U] 4,2W / 605lm / 250mA		LED [U] 4,2W / 580lm / 250mA		LED [U] 4,2W / 532lm / 250mA		LED [U] 4,2W / 510lm / 250mA	
18°	37°	18°	37°	18°	37°	18°	37°
26318 8310 ◇	26318 8330 ◇	26318 8210 ◇	26318 8230 ◇	26318 9310 ◇	26318 9330 ◇	26318 9210 ◇	26318 9230 ◇
◇ B / W							
  							

EN-SUITE 2S



93 x 48 x 50 / max.25


REQUIREMENTS
LED POWER SUPPLY 250mA-DC / DIM

3000K / CRI>80		2700K / CRI>80		3000K / CRI>90		2700K / CRI>90	
2 x LED [U] 4,2W / 605lm / 250mA		2 x LED [U] 4,2W / 580lm / 250mA		2 x LED [U] 4,2W / 532lm / 250mA		2 x LED [U] 4,2W / 510lm / 250mA	
18°	37°	18°	37°	18°	37°	18°	37°
26319 8310	26319 8330	26319 8210	26319 8230	26319 9310	26319 9330	26319 9210	26319 9230

◇ B / W

0,2 IP20

EN-SUITE 2S IP



93 x 48 x 50 / max.25


REQUIREMENTS
LED POWER SUPPLY 250mA-DC / DIM

3000K / CRI>80		2700K / CRI>80		3000K / CRI>90		2700K / CRI>90	
2 x LED [U] 4,2W / 605lm / 250mA		2 x LED [U] 4,2W / 580lm / 250mA		2 x LED [U] 4,2W / 532lm / 250mA		2 x LED [U] 4,2W / 510lm / 250mA	
18°	37°	18°	37°	18°	37°	18°	37°
26320 8310	26320 8330	26320 8210	26320 8230	26320 9310	26320 9330	26320 9210	26320 9230

◇ B / W

0,2 IP20 IP44

LED POWER SUPPLY 250mA-DC



250mA / 10W DIM5

min. 40


DALI DIMMABLE

21012 0095

1-2

220-240V / 0|50-60Hz

0,1 IP20



250mA / 10W

min. 40

NON DIMMABLE

21012 0080

1-2

110-240V / 0|50-60Hz

0,1 IP20

LED [U]