


TECHNICAL | THIN Shared Task Lamp

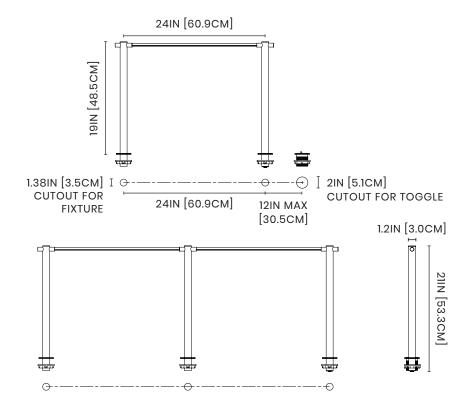

LIGHT SEGMENTS MAY BE COMBINED IN THE SAME FIXTURE STANDARD MAX LENGTH PER FIXTURE IS (3) 24" LIGHT SEGMENTS 75IN [190.5CM] FOR LONGER RUNS, PLEASE CONTACT JUNIPER



CLEAR LENS 40° BEAM ANGLE



FROSTED LENS 90° BEAM ANGLE



PLUG-IN POWER GROUND SUPPLY



CONTROL TOGGLE SWITCH DIMMER DIAL INSET SWITCH, 2.5IN X 2.5IN



GROUND CONTROL INSET DIMMER, 2.5IN X 2.5IN



GROUND CONTROL DIMMER KNOB INSET DIMMER, 2.5IN X 2.5IN

ILLUMINATION

90 CRI standard 2700K, 3000K, 3500K, 4000K options

24" segment 600LM delivered / 6.8W 36" segment 920LM delivered / 9.6W 90LM/W with clear acrylic lens 50,000 hrs LED life L80

POWER

100-120VAC Input Voltage 24VDC Class 2 Constant Voltage Contact Juniper for alternate inputs

FINISHES

Satin Brass, Black Oxide, Satin Nickel


MATERIALS

Solid brass, PMMA

SYSTEM RUN

Limited by power supply wattage only

BUILD A SPECIFICATION | THIN Shared Task Lamp

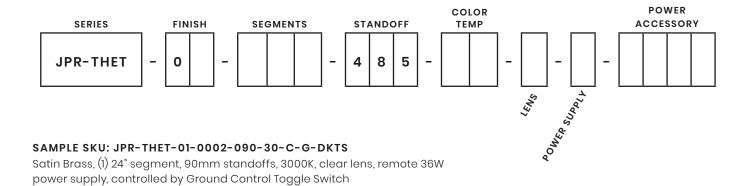

CODE DEFINITIONS

FINISHES







01 Satin Brass

02 Black Oxide

03 Satin Nickel

SEGMENTS

O No segment

2 24IN segment - 600LM delivered - 6.8W

3 36IN segment - 920LM delivered - 9.6W

note: each digit represents a single segment, e.g. 0022 is (2) 24" segments

Contact Juniper for custom segment lengths

STANDOFF LENGTH

485 485mm Standoffs

COLOR TEMPERATURE

27 2700K

30 3000K

35 3500K

40 4000K

LENS

C Clear - 40° beam angle F Frosted - 90° beam angle

POWER SUPPLY

G Plug-in Power Supply, 24VDC **Output Wattage** 36W, or 40W 3 meters of cord included

Contact Juniper for alternate dimming requirements

POWER ACCESSORY

DKTS Ground Control Toggle Switch **DKDK** Ground Control Dimmer Knob **DKDD** Ground Control Dimmer Dial

*Brass Unifying Plate sold separately.

| Project | Туре |
|---------|------|
| Notes | |
| | |