

NEW


LASS-OH!

OVERVIEW

Lass-Oh! glides through the room as a snake sliding through the greensward, showing off its slim cylindrical contour in combination with the miniature LED clusters hidden inside its body. The variety in shape - straight lines or curved squares and rectangles - in combination with the optional shades make of Lass-Oh! a very decorative lighting solution. Nevertheless, Lass-Oh! can easily be hung in every residential, retail or office project thanks to its low-glare LED dots that are hidden away into the profile.



INTERIOR
CEILING SURFACE / SUSPENDED

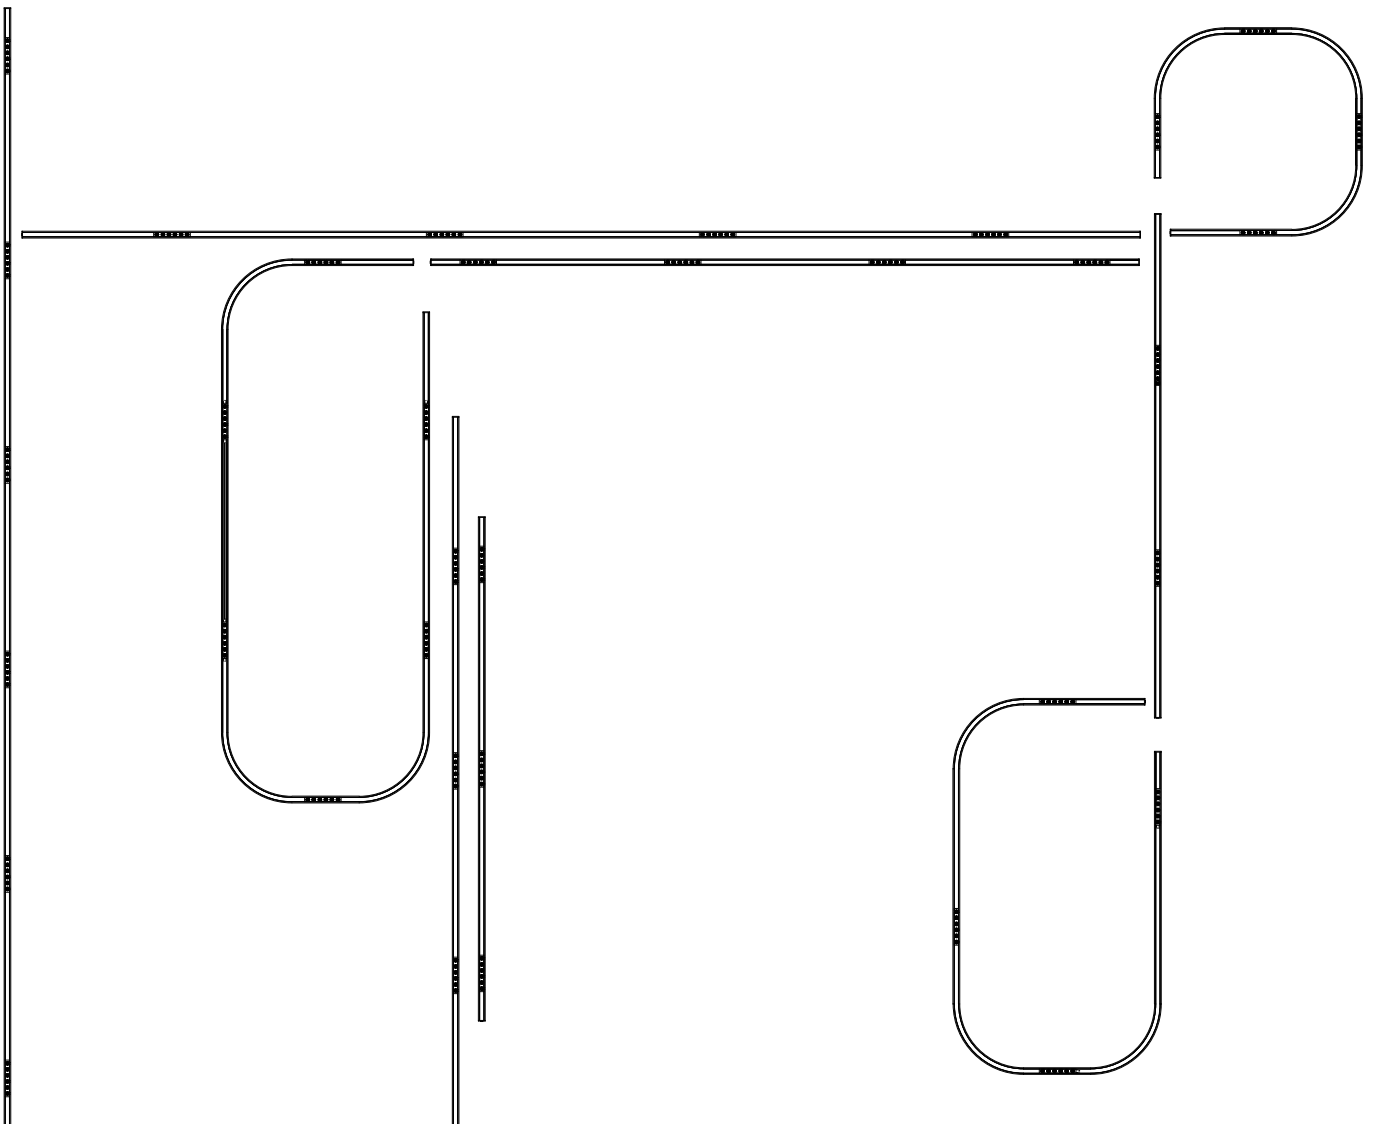


NEW LASS-OH!



JIHAI R


JIHAI S

LASS-OH! 6060




3000K / CRI>90	2700K / CRI>90
4 x LED CLUSTER 6W / 606lm / 350mA	4 x LED CLUSTER 6W / 588lm / 350mA
34°	
24811 9320 ◇	24811 9220 ◇
◇ B / GC	
INCL. 4 x CABLE SUSP. SINGLE AUTO. 1.6m BLACK INCL. 1 x CABLE 2 x 0,75mm ²	
◇ 1,2 IP20	

LASS-OH! 60110



3000K / CRI>90	2700K / CRI>90
4 x LED CLUSTER 6W / 606lm / 350mA	4 x LED CLUSTER 6W / 588lm / 350mA
34°	
24812 9320 ◇	24812 9220 ◇
◇ B / GC	
INCL. 4 x CABLE SUSP. SINGLE AUTO. 1.6m BLACK INCL. 1 x CABLE 2 x 0,75mm ²	
◇ 1,5 IP20	

LASS-OH! 60160



3000K / CRI>90	2700K / CRI>90
6 x LED CLUSTER 6W / 606lm / 350mA	6 x LED CLUSTER 6W / 588lm / 350mA
34°	
24813 9320 ◇	24813 9220 ◇
◇ B / GC	
INCL. 4 x CABLE SUSP. SINGLE AUTO. 1.6m BLACK INCL. 1 x CABLE 2 x 0,75mm ²	
◇ 1,9 IP20	

REQUIREMENTS ► SEE BELOW (FOR LINE 6060 / 60110 / 60160)
LED POWER SUPPLY MULTI POWER / DIM
or
LASS-OH! POWERBOX B

OPTIONS

CABLE BASE R ◇ ► **203 99 55** ANO / B / W
COVERSET R ◇ (Ø 62) ► **204 00 62** ANO / B / W
COVERSET R ◇ (Ø 90) ► **204 00 90** ANO / B / W
COVERSET R ◇ (Ø 100) ► **204 00 100** ANO / B / W

ACCESSORIES (NOT FOR LINE 6060)

JiHA! R ◇ ► **24814 0030** B
JiHA! S ◇ ► **24814 0020** B

LED POWER SUPPLY


DIM1: DIMMING BY 1-10V / DIM5: DIMMING BY DALI

NON DIM	DIM1	DIM5
 97 x 44 x 22	 97 x 44 x 30	 97 x 44 x 30
21012 0010	21012 0021	21012 0035

220-240V / 50-60Hz

□ IP20


LASS-OH! POWERBOX



NON DIM	DIM1	DIM5
24814 0010 ◇	24814 0011 ◇	24814 0015 ◇
◇ B		
220-240V / 50-60Hz		


◇ IP20

LASS-OH! L150




3000K / CRI>90		2700K / CRI>90	
2 x LED CLUSTER 6W / 606lm / 350mA	3 x LED CLUSTER 6W / 606lm / 350mA	2 x LED CLUSTER 6W / 588lm / 350mA	3 x LED CLUSTER 6W / 588lm / 350mA
34°			
24815 9320 ◇	24816 9320 ◇	24815 9220 ◇	24816 9220 ◇
◇ B / GC			
INCL.2 x CABLE SUSP. SINGLE AUTO. 1.6m BLACK INCL.1 x CABLE 2 x 0,75mm²			
◇ IP20			

LASS-OH! L210



3000K / CRI>90		2700K / CRI>90	
3 x LED CLUSTER 6W / 606lm / 350mA	4 x LED CLUSTER 6W / 606lm / 350mA	3 x LED CLUSTER 6W / 588lm / 350mA	4 x LED CLUSTER 6W / 588lm / 350mA
34°			
24817 9320 ◇	24818 9320 ◇	24817 9220 ◇	24818 9220 ◇
◇ B / GC			
INCL.2 x CABLE SUSP. SINGLE AUTO. 1.6m BLACK INCL.1 x CABLE 2 x 0,75mm²			
◇ IP20			

LASS-OH! L330



3000K / CRI>90		2700K / CRI>90	
4 x LED CLUSTER 6W / 606lm / 350mA	6 x LED CLUSTER 6W / 606lm / 350mA	4 x LED CLUSTER 6W / 588lm / 350mA	6 x LED CLUSTER 6W / 588lm / 350mA
34°			
24820 9320 ◇	24819 9320 ◇	24820 9220 ◇	24819 9220 ◇
◇ B / GC			
INCL.3 x CABLE SUSP. SINGLE AUTO. 1.6m BLACK INCL.1 x CABLE 2 x 0,75mm²			
◇ IP20			

REQUIREMENTS ► SEE BELOW (FOR LINE L150 / L210 / L330)
LED POWER SUPPLY MULTI POWER / DIM
or
LASS-OH! POWERBOX B

OPTIONS

CABLE BASE R ◇ ► **203 99 55** ANO / B / W
COVERSET R ◇ (Ø 62) ► **204 00 62** ANO / B / W
COVERSET R ◇ (Ø 90) ► **204 00 90** ANO / B / W
COVERSET R ◇ (Ø100) ► **204 00 100** ANO / B / W

ACCESSORIES


J1HA! R ◇ ► **24814 0030** B
J1HA! S ◇ ► **24814 0020** B

LED POWER SUPPLY

DIM1: DIMMING BY 1-10V / DIM5: DIMMING BY DALI

NON DIM	DIM1	DIM5
 97 x 44 x 22	 97 x 44 x 30	 97 x 44 x 30
21012 0010	21012 0021	21012 0035
220-240V / 50-60Hz		
□ IP20		

LASS-OH! POWERBOX



NON DIM	DIM1	DIM5
24814 0010 ◇	24814 0011 ◇	24814 0015 ◇
◇ B		
220-240V / 50-60Hz		
◇ IP20		



