



ODRON

TAKE ANOTHER LOOK

Don't be fooled: Odron may look peculiar at first sight, nevertheless its specific design is intended to create a compact yet powerful lighting solution.

A second look puts everything in perspective: the flat design of the disc in combination with the shallow base results in a highly functional luminaire within a limited height of 45mm.

As from now, any additional look on it makes you appreciate Odron more and more: its possibility to serve both as a straightforward downlight or as an omnidirectional spotlight, the shiny details of the cover in contrast with the structured lacquer of the body or the touch of colour it adds thanks to the additional golden cover, it is clear that Odron enriches the space in more than one way.



FAMILY OVERVIEW

CHOOSE YOUR COLOUR



White, Black

Finish off with a golden cover

CHOOSE YOUR INSTALLATION

Semi-recessed as clip version

-

As module in our magnetic profiles
(single or double)

-

Surface mounted
(single or double)

CHOOSE YOUR POWER


5,9W / 606lm

-

8,7W / 896lm

CHOOSE YOUR OPTICS

25° / 37°

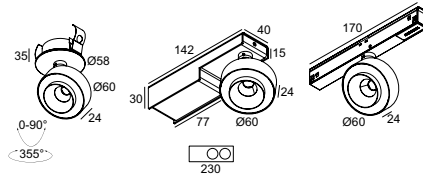

COMPACT FLEXIBILITY


Odron is available as Clip version and as a single or double spot to be mounted onto the ceiling or as module for our magnetic profile range. Whatever installation, Odron stands out in being compact without sacrificing on flexibility: semi-recessed as a Clip version or mounted into the magnetic profiles, all you get to see is its flat disc, able to rotate through the room up to 350° and tilt up to 90° thanks to the short hinge, perfectly hidden away behind the disc.

As a surface mounted spotlight, the driverbox is designed to be in line with the spot modules, limiting the total installation height of the luminaire to a bare minimum.



ODRON

ODRON CLIP



50 x 40

REQUIREMENTS

LED POWER SUPPLY 350-500MA-DC / DIM

OPTIONS

MOUNTING KIT FLUSH SPY ▶ 414 90 01


ACCESSORIES

ODRON COVER ◊ ▶ 26210 0020 GC

3000K / CRI>90	2700K / CRI>90
LED [Q] 5,9W / 649lm / 350mA LED [Q] 8,7W / 896lm / 500mA	LED [Q] 5,9W / 606lm / 350mA LED [Q] 8,7W / 837lm / 500mA
28 & 41° (INCL. 2 REFLECTORS)	
26213 9300 ◊	26213 9200 ◊

◊ B-B / W-W


IP20



ODRON CLIP

ODRON CLIP +
MOUNTING KIT
FLUSH SPY

ODRON ON 1



ACCESSORIES

ODRON COVER ◊ ▶ 26210 0020 GC


3000K / CRI>90	2700K / CRI>90
LED 5,9W / 649lm / 350mA	LED 5,9W / 606lm / 350mA
MAINS DIMMING (FE)	
28 & 41° (INCL. 2 REFLECTORS)	
26214 9308 ◊	26214 9208 ◊

◊ B / W

220-240V / 50-60Hz

IP20

ODRON ON 2



ACCESSORIES


ODRON COVER ◊ ▶ 26210 0020 GC

3000K / CRI>90	2700K / CRI>90
2 x LED 5,9W / 649lm / 350mA	2 x LED 5,9W / 606lm / 350mA
MAINS DIMMING (FE)	
28 & 41° (INCL. 2 REFLECTORS)	
26215 9308 ◊	26215 9208 ◊

◊ B / W

220-240V / 50-60Hz

IP20

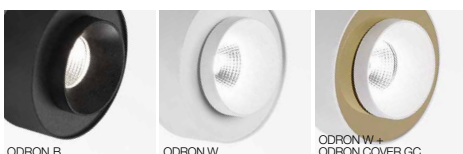


ODRON B

ODRON W

ODRON W +
ODRON COVER GC

ODRON 1 MAGNETIC



REQUIREMENTS
LED POWER SUPPLY 48V-DC

OPTIONS
DIMMABLE MODULATOR
(ONLY FOR MDL)

ACCESSORIES
ODRON COVER ◊ ▶
26210 0020 GC


MDL		
	3000K / CRI>90 LED 8,7W / 896lm / 48V-DC	2700K / CRI>90 LED 8,7W / 837lm / 48V-DC
28 & 41° (INCL. 2 REFLECTORS)		
M20	26216 9300 ◊	26216 9200 ◊
M26L	26220 9300 ◊	26220 9200 ◊
M26H	26216 9300 ◊	26216 9200 ◊
M35R	26220 9300 ◊	26220 9200 ◊
M44	-	-
M52	-	-

DALI DIM		
	3000K / CRI>90 LED 8,7W / 896lm / 48V-DC	2700K / CRI>90 LED 8,7W / 837lm / 48V-DC
28 & 41° (INCL. 2 REFLECTORS)		
M20	26217 9305 ◊	26217 9205 ◊
M26L	26221 9305 ◊	26221 9205 ◊
M26H	26217 9305 ◊	26217 9205 ◊
M35R	26221 9305 ◊	26221 9205 ◊
M44	-	-
M52	-	-

◊ B / W

◻ 0,3 IP20

ODRON 2 MAGNETIC



REQUIREMENTS
LED POWER SUPPLY 48V-DC

OPTIONS
DIMMABLE MODULATOR
(ONLY FOR MDL)

ACCESSORIES
ODRON COVER ◊ ▶
26210 0020 GC

MDL		
	3000K / CRI>90 2 x LED 8,7W / 896lm / 48V-DC	2700K / CRI>90 2 x LED 8,7W / 837lm / 48V-DC
28 & 41° (INCL. 2 REFLECTORS)		
M20	26218 9300 ◊	26218 9200 ◊
M26L	26222 9300 ◊	26222 9200 ◊
M26H	26218 9300 ◊	26218 9200 ◊
M35R	26222 9300 ◊	26222 9200 ◊
M44	-	-
M52	-	-

DALI DIM		
	3000K / CRI>90 2 x LED 8,7W / 896lm / 48V-DC	2700K / CRI>90 2 x LED 8,7W / 837lm / 48V-DC
28 & 41° (INCL. 2 REFLECTORS)		
M20	26219 9305 ◊	26219 9205 ◊
M26L	26223 9305 ◊	26223 9205 ◊
M26H	26219 9305 ◊	26219 9205 ◊
M35R	26223 9305 ◊	26223 9205 ◊
M44	-	-
M52	-	-

◊ B / W

◻ 0,4 IP20