



reddot winner 2020
lighting design

PION

THE QUEEN, NOT THE PAWN

The shape of Pion resembles a lot the one of a pawn in a game of chess, but that is also the only resemblance. Opposite to a pawn, Pion is able to move around freely thanks to its unique Ex-centric Rotation System (ERS).

Starting as a fix downlight, Pion can easily be turned into a periscope overlooking the room, simply by rotating its head.

The Ex-centric Rotation System then enables Pion to tilt its head, allowing it to spy around over 355° and tilt up to 90°, so aiming possibilities are unlimited.

Its elegant design in combination with the frisky colour combinations transform Pion immediately into the queen of the room, overlooking the scenery. Like any jewel, the colourful tubes serve as an accessory to top off its feminine shape in style.





BALANCED IN FORM AND FUNCTION

Pion is available as semi-recessed version, as surface mounted spotlight or as a plug-in module for our magnetic profile range.

As a recessed variant, the Ex-centric Rotation System is semi-recessed into the ceiling, hiding away the more technical part of the luminaire.

As a ceiling mounted solution - with up to 3 modules per luminaire - Pion is not only about the looks, it is a textbook example of form meets function.

In this way, the triple surface mounted version of Pion completes 4 functions. 3 of them are lighting up the room in 3 different ways from only 1 feeding point, the 4th is doing it without compromising on style. The clean lines of the driverbox perfectly complement the organic shape of the luminaire's body.

FAMILY OVERVIEW

CHOOSE YOUR COLOUR



White, Black or Gold Coloured
Finish off with a
Golden or Black inner tube

CHOOSE YOUR INSTALLATION

Semi-recessed

As module in our magnetic profiles

Surface mounted
(single, double or triple)


CHOOSE YOUR POWER

5,9W / 606lm


8,7W / 896lm

CHOOSE YOUR OPTICS

25° / 37°

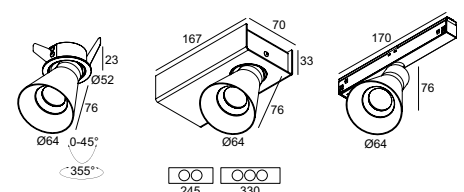

PION



46 x 40 / min.5

REQUIREMENTS

LED POWER SUPPLY 350-500mA-DC / DIM


ACCESSORIES

PION TUBE > 26610 0010 B / MMAT

3000K / CRI>90		2700K / CRI>90	
LED [Q] 5,9W / 649lm / 350mA LED [Q] 8,7W / 896lm / 500mA		LED [Q] 5,9W / 606lm / 350mA LED [Q] 8,7W / 837lm / 500mA	
25°	37°	25°	37°
26611 9320 ◇	26611 9330 ◇	26611 9220 ◇	26611 9230 ◇
◇ B-B / GC-B / W-W			

◇ 0,2 IP20

PION ON 1




ACCESSORIES

PION TUBE > 26610 0010 B / MMAT

3000K / CRI>90		2700K / CRI>90	
LED 5,9W / 649lm / 350mA		LED 5,9W / 606lm / 350mA	
MAINS DIMMING (FE)			
25°	37°	25°	37°
26612 9328 ◇	26612 9338 ◇	26612 9228 ◇	26612 9238 ◇
◇ B-B / GC-B / W-W			
220-240V / 50-60Hz			

◇ 0,7 IP20

PION ON 2




ACCESSORIES

PION TUBE > 26610 0010 B / MMAT

3000K / CRI>90		2700K / CRI>90	
2 x LED 5,9W / 649lm / 350mA		2 x LED 5,9W / 606lm / 350mA	
MAINS DIMMING (FE)			
25°	37°	25°	37°
26613 9328 ◇	26613 9338 ◇	26613 9228 ◇	26613 9238 ◇
◇ B-B / GC-B / W-W			
220-240V / 50-60Hz			

◇ 1,2 IP20

PION ON 3



ACCESSORIES

PION TUBE > 26610 0010 B / MMAT

3000K / CRI>90		2700K / CRI>90	
3 x LED 5,9W / 649lm / 350mA		3 x LED 5,9W / 606lm / 350mA	
MAINS DIMMING (FE)			
25°	37°	25°	37°
26614 9328 ◇	26614 9338 ◇	26614 9228 ◇	26614 9238 ◇
◇ B-B / GC-B / W-W			
220-240V / 50-60Hz			

◇ 1,5 IP20




PION B

PION B + PION TUBE MMAT

PION W

PION W + PION TUBE B

PION 1 MAGNETIC



REQUIREMENTS
LED POWER SUPPLY 48V-DC

OPTIONS
DIMMABLE MODULATOR
(ONLY FOR MDL)

ACCESSORIES
PION TUBE ◇ ▶
26610 0010 B / MMAT

MDL				
3000K / CRI>90		2700K / CRI>90		
LED 8,7W / 896lm / 48V-DC		LED 8,7W / 837lm / 48V-DC		
	25°	37°	25°	37°
M20	26616 9320 ◇	26616 9330 ◇	26616 9220 ◇	26616 9230 ◇
M26L	26615 9320 ◇	26615 9330 ◇	26615 9220 ◇	26615 9230 ◇
M26H	26616 9320 ◇	26616 9330 ◇	26616 9220 ◇	26616 9230 ◇
M35R	26615 9320 ◇	26615 9330 ◇	26615 9220 ◇	26615 9230 ◇
M44	-	-	-	-
M52	-	-	-	-

DALI DIM				
3000K / CRI>90		2700K / CRI>90		
LED 8,7W / 896lm / 48V-DC		LED 8,7W / 837lm / 48V-DC		
	25°	37°	25°	37°
M20	26618 9325 ◇	26618 9335 ◇	26618 9225 ◇	26618 9235 ◇
M26L	26617 9325 ◇	26617 9335 ◇	26617 9225 ◇	26617 9235 ◇
M26H	26618 9325 ◇	26618 9335 ◇	26618 9225 ◇	26618 9235 ◇
M35R	26617 9325 ◇	26617 9335 ◇	26617 9225 ◇	26617 9235 ◇
M44	-	-	-	-
M52	-	-	-	-

| ◇ B / GC / W | | | | |
| 0,3 IP20 | | | | |